



### The pinout of the RJ45 connector:




10-PIN	8-PIN	Signal	I/O	Description
1	/	Reserved	Reserved	Reserved
2	1	VCC	P	Power input, 24V
3	2	VCC	P	Power input, 24V
4	3	TXD	O	RS-232 output
5	4	RXD	I	RS-232 input
6	5	Reserved	Reserved	Reserved
7	6	Reserved	Reserved	Reserved
8	7	GND	P	Ground
9	8	GND	P	Ground
10	/	Reserved	Reserved	Reserved

### The pinout of the USB TYPE C:

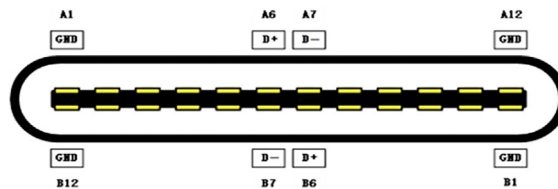

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND					D+	D-					GND
GND					D-	D+					GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

### The pinout of the DC connector:

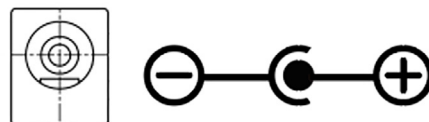

PIN	Signal	I/O	Description
In	VCC	P	Power input, +24V
Out	GND	P	Ground

### Dimensions (unit: mm)

