


SKT-101H-CBK02-PSEL

10.1 inch Open-Frame Touch Monitor

Projected Capacitive Touch screens 4mm &vandal-proof 5 touch points

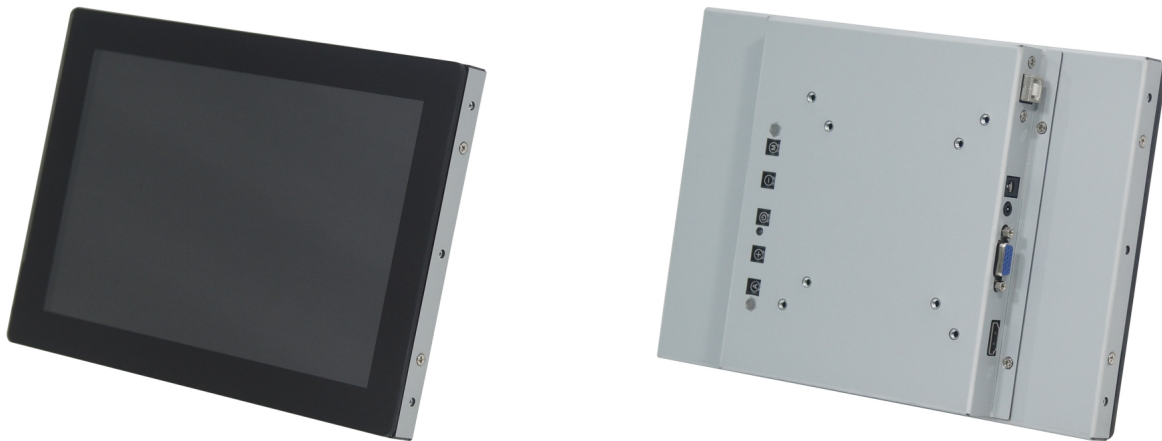

SKT-101H Serials Model Definitions

SKT-101H-CBK02-PSEL	Projected capacitive (PCAP) Touch Screen	VGA/HDMI	Vandal Proof glass 4mm
---------------------	--	----------	------------------------

Seleniko 03, S.L.

PUBLISHED DATE:2020-06-01

Open Frame Touch Monitor Parameters

General	
Model	SKT-101H-CBK02-PSEL
Series	Open frame
Monitor Dimensions	Width: 258mm Height: 176mm Depth: 38.8mm
LCD Type	10.1" a-Si TFT-LCD, LCM
Video Input	VGA/HDMI
OSD controls	Allow on-screen adjustments of Brightness, Contrast Ratio, Auto-adjust, Phase, Clock, H/V Location, Languages, Function, Reset
Power Supply	Type: External brick Input (line) voltage: 100-240 VAC, 50-60 Hz Output voltage/current: 24 volts at 3 amps max
Mount Interface	1)VESA 75*75mm, 100*100mm 2)Rear Mounting
LCD Specification	
Active Area(mm)	218 (H) x 136.6(V)
Resolution	1280(RGB)×800 [WXGA]
Dot Pitch(mm)	0.0565×0.1695 (H×V)
Nominal Input Voltage VDD	+3.3V
Viewing angle (v/h)	80/80/80/80 (Typ.)(CR≥10)
Contrast	500:1
Luminance(cd/m2)	Panel: 400cd/m2, With PCAP Touch:325cd/m2
Response Time(Rising)	30 (Typ.)(Tr+Td) ms
Support Color	16.7M (6-bit / 8-bit)
Backlight MTBF(hr)	10K hours
Touchscreen Specification	
Type	Projected Capacitive touch screen 4mm thick glass
Multi touch	5 points touch HID complian (driverless)
Touch Life Cycle	10 millions
Touch Response time	8ms
Touch System Interface	USB interface
Power consumption	+5V@80mA
External AC Power Adapter	
Output	DC 24V /3A
Input	100-240 VAC, 50-60 Hz
MTBF	50000 hr at 25°C
Environment	
Operating Temp.	-0～50°C
Storage Temp.	-20～60°C
Operating RH:	20%～80%
Storage RH:	10%～90%

Components

USB Cable 180cm*1 Pcs,
HDMI Cable 180cm*1 Pcs,
Power Cord with Switching Adapter *1 Pcs,
Bracket



USB Cable A-B



VGA Cable (Option)



DVI Cable (Option)



HDMI Cable



DC Power Supply With Cord



Rear Bracket

Intended usage

Monitor capable of directly connecting to and designed for use with an automatic data processing machine of heading 8471 (HS-CODE: 8528521000).

Application

Product is intended only for OEM (Original Equipment Manufacturer) application.
Product used for application on industrial control gaming, transportation, finance, retail...

Mechanical Drawing

